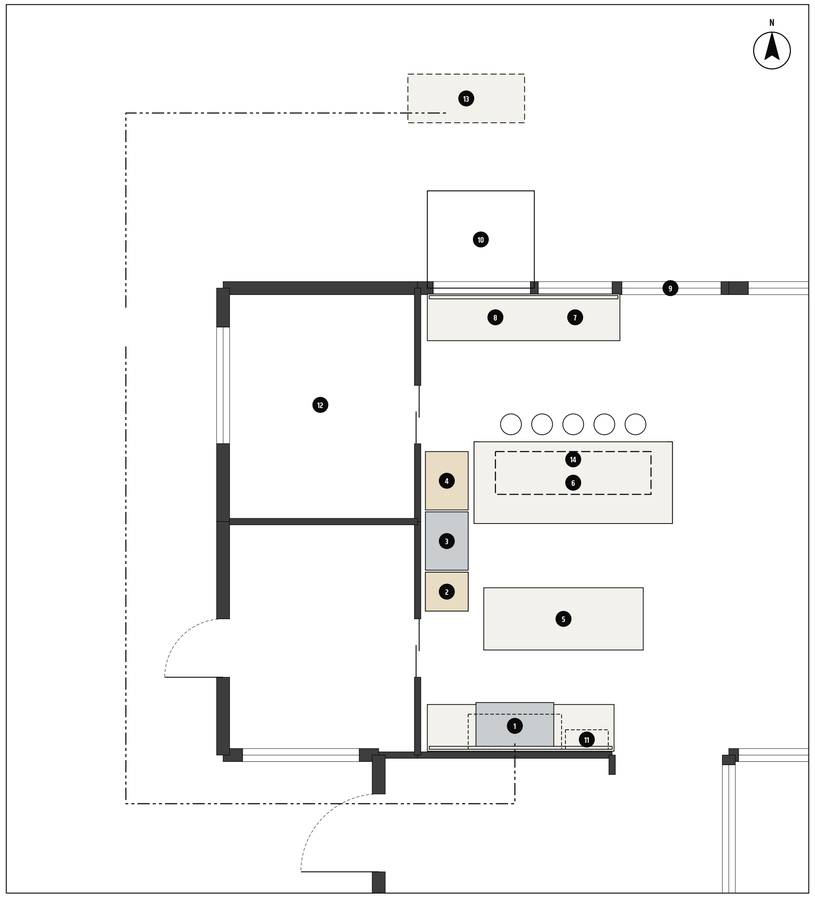

1 KITCHEN PLAN

SCALE: 1/4" = 1'-0"

KEYNOTES

1. 48" pro gas range, wok burner, hood hidden in oak cabinetry above
2. Appliance garage, oak pocket doors, GFCI outlets
3. Built-in stainless fridge 36" (not panel-ready)
4. Steam oven + wall oven column
5. Work island: flush 2-zone induction, quartzite top
6. 10' quartzite waterfall island, 5 stools on one side
7. Integrated quartzite sink + brushed stainless faucet, garden-view window
8. Dishwasher left of sink
9. Lift-and-slide pocket wall, opens fully to the pergola
10. Hydroponic herb wall (glazed nook) behind glass backsplash
11. Open rift oak shelves
12. Walk-in pantry (104), no scullery
13. Optional covered outdoor wok station
14. Skylight SK-1 over island + linear suspended LED

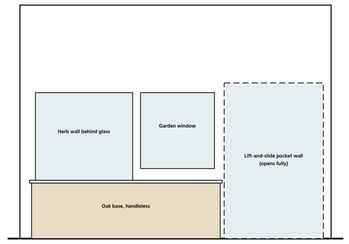

2 NORTH ELEVATION: SINK + SLIDE WALL

SCALE: 1/4" = 1'-0"

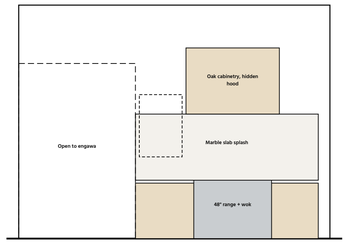

3 SOUTH ELEVATION: RANGE WALL

SCALE: 1/4" = 1'-0"

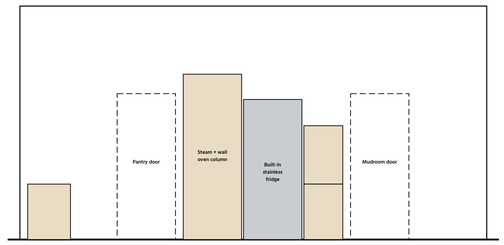

4 WEST ELEVATION: TALL WALL + PANTRY

SCALE: 1/4" = 1'-0"

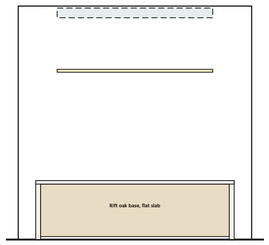

5 ISLAND ELEVATION: QUARTZITE WATERFALL

SCALE: 1/4" = 1'-0"

MATERIAL + APPLIANCE SCHEDULE

ITEM	SELECTION
Cabinets	Rift white oak, flat slab, handleless (finger-pull reveal)
Counters	Honed quartzite, 30 mm, mitred 60 mm edge
Island	10' quartzite waterfall, stools on one side
Sink	Integrated quartzite, carved from the counter
Faucet	Brushed stainless (not brass, kitchen only)
Backsplash	Honed marble slab (zellige or plaster alternate)
Range	48" pro gas with high-heat wok burner
Hood	Insert hidden in oak cabinetry, 1,500 m3/h + MUA
Fridge	36" built-in stainless
Ovens	Steam oven + wall oven column
Cooktop 2	Flush 2-zone induction in work island
Lighting	Skylight + linear suspended LED; shelf strips
Opening	Lift-and-slide pocket wall to pergola

ROUGH COST (THB, EXCL. VAT)

ITEM	THB
Rift white oak flat-slab handleless cabinetry (~11 m run + 2 islands + tall wall)	1,350,000
Quartzite slabs: counters, waterfall island, integrated sink	950,000
48" pro gas range with wok burner	420,000
Hidden hood insert + 1,500 m³/h blower + MUA-1	220,000
Steam oven + wall oven column	330,000
Built-in stainless fridge 36"	360,000
Flush 2-zone induction (work island)	85,000
Skylight SK-1 + linear suspended LED	210,000
Lift-and-slide pocket wall (5 m, bronze)	520,000
LPG cage, gas line, solenoid + detector	65,000
Outdoor wok station (optional)	120,000

Kitchen total about 4,650,000 THB

Excluded per swipe: scullery/back kitchen, table-extension or furniture-style island, limestone, terrazzo, walnut, painted or plaster cabinets, shaker doors, undermount stainless sink, unlacquered brass faucet, panel-ready fridge.

WEBERMAN RESIDENCE

Mountain courtyard house, Thailand
Owner: Max Weberman

ISSUE

Design Development

NOT FOR CONSTRUCTION

DATE
11 Oct 2026

SCALE
1/4" = 1'-0"

MODEL
bim.json (from plan.json)

UNITS
Feet + inches (mm for members)

REVISION
DD-01

KITCHEN NOTES

Wok burner stays in the main kitchen (no scullery) with a wok-rated hidden hood and interlocked make-up air; outdoor wok station is optional.

Gas leak detector closes the range solenoid and boosts the hood (E-103).

Clearances: 42" min between islands and runs.

SHEET TITLE

Kitchen Plan + Elevations

SHEET

A-401