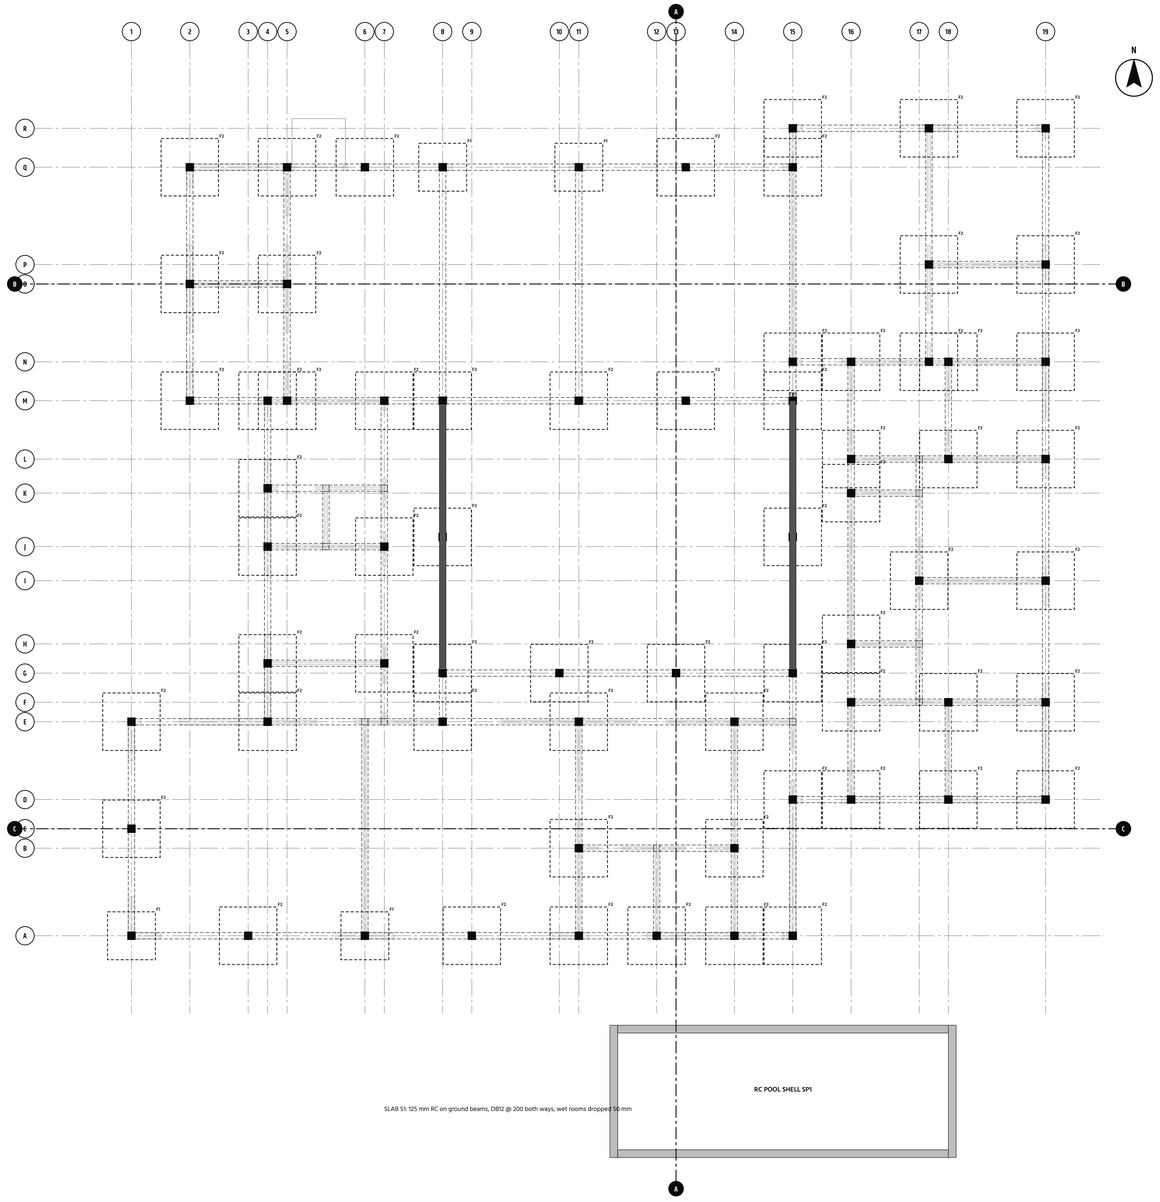

STRUCTURAL SCHEDULE

MARK	ELEMENT	SIZE (MM)	REINFORCEMENT (INDICATIVE)	QTY
F1	Spread footing (corner / edge)	1,500 x 1,500 x 400	10-DB16 each way, 75 mm cover	4
F2	Spread footing (interior / multi-bay)	1,800 x 1,800 x 400	12-DB16 each way	64
C1	RC column	250 x 250	4-DB16 (8-DB16 at TB1), RB9 ties @ 150	68
GB1	Ground beam	200 x 500	3-DB16 top + bot, RB9 @ 150	100
RB1	Roof ring beam (exterior)	200 x 400	2-DB16 top + bot, RB9 @ 150	37
RB2	Roof beam (interior bearing)	150 x 300	2-DB12 top + bot, RB6 @ 150	64
TB1	Steel transfer beam over wide glazing	W250 assumed	Engineer to size, deflection L/600 for glass	2
S1	Suspended floor slab	125 thick	DB12 @ 200 B.W., WP membrane in wet rooms	31
SP1	Pool shell	250 walls + floor	Waterproof concrete, DB16 @ 150 E.F.	1

STRUCTURAL LEGEND

- RC column C1
- Footing (below)
- Ground beam GB1 (below)
- Structural grid

STRUCTURAL NOTES (INDICATIVE)

Concrete: f'c' 240 ksc (cylinder) footings + frame; 280 ksc pool. Rebar: SD40 deformed, SR24 round.

Allowable soil bearing assumed 10 t/m² pending a soil test; footings 1.5 m below grade.

Seismic zone + wind per DPT 1301/1302 and 1311 to be confirmed by a licensed Thai civil engineer (Saman Witsawakon).

All sizes are concept placeholders for coordination only.

1 **FOUNDATION + STRUCTURAL PLAN**

SCALE: 1/8" = 1'-0"

WEBERMAN RESIDENCE

Mountain courtyard house, Thailand
Owner: Max Weberman

ISSUE

Design Development

NOT FOR CONSTRUCTION

DATE
11 Oct 2026

SCALE
1/8" = 1'-0"

MODEL
bim.json (from plan.json)

UNITS
Feet + inches (mm for members)

REVISION
DD-01

SHEET TITLE

Foundation + Structural Plan

SHEET

S-101